

# Technical Data Sheet

CODE 11201

M 100/4"

Wall/window axial fans



## Certifications



IMQ



CE



IMQ Performance



CCC




EAC

## TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,1	Ø Discharge Hole (mm)	99
Absorbed Power max (W)	18	Voltage (V)	230-240
Frequency (Hz)	50	Weight (Kg)	0,6
Insulation Class	II°	Delivery max (l/s)	25
IP	X4	Delivery max (m <sup>3</sup> /h)	90
Max ambient temperature for continuous operation (°C)	50	Pressure max (mmH <sub>2</sub> O)	3
Max. absorbed power at max speed (W)	18	Pressure max (Pa)	29
Nominal Diameter (mm)	100	RPM	2300
		Sound Pressure level L <sub>p</sub> [dB (A)] 3m	37,5

## DIMENSIONS

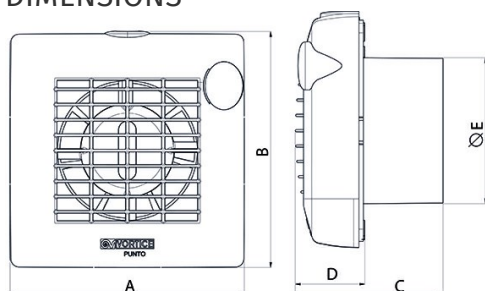

Etichetta Energetica	NO
Size A (mm)	159
Size B (mm)	160
Size C (mm)	100
Size D (mm)	47
Size E (mm)	Ø 99

### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 11201

M 100/4"

Wall/window axial fans



## DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 100 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 90 m<sup>3</sup>/h.
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controller.

## ACCESSORIES



**C 1.5**  
**(COMANDO EL.**  
**1.5 A)**  
Code 12966



**SCNRB**  
**SCAT.COM.NON**  
**REV.INCASSO**  
Code 12971



**KIT SCB**  
**(TRASF.E.C.)**  
Code 22481



**S 100/4**  
Code 22154

### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)  
Pre & Post Vendita: fax +39 02 90699302  
Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)