

# Technical Data Sheet

CODE 11411

## M 150/6" T

Wall/window axial fans



### Certifications



IMQ



CE



IMQ Performance



CCC




EAC

### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,15	Voltage (V)	220-240
Absorbed Power max (W)	30	Weight (Kg)	1,1
Frequency (Hz)	50	Delivery max (l/s)	93,1
Insulation Class	II°	Delivery max (m <sup>3</sup> /h)	335
IP	X4	Pressure max (mmH2O)	6
Max ambient temperature for continuous operation (°C)	50	Pressure max (Pa)	59
Nominal Diameter (mm)	156	RPM	2100
Ø Discharge Hole (mm)	156	Sound Pressure level Lp [dB (A)] 3m	46

### DIMENSIONS

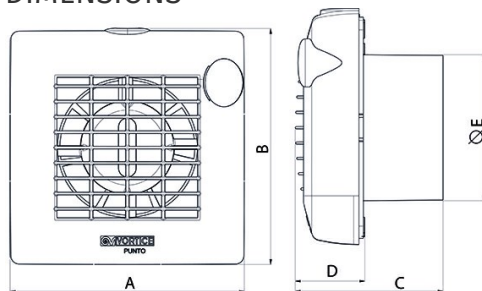

Etichetta Energetica	NO
Size A (mm)	214
Size B (mm)	215
Size C (mm)	117
Size D (mm)	47
Size E (mm)	Ø
	156

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 11411

## M 150/6" T


Wall/window axial fans



### DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 335 m<sup>3</sup>/h.
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').
- IMQ SAFETY and IMQ PERFORMANCE certifications.

### CURVES

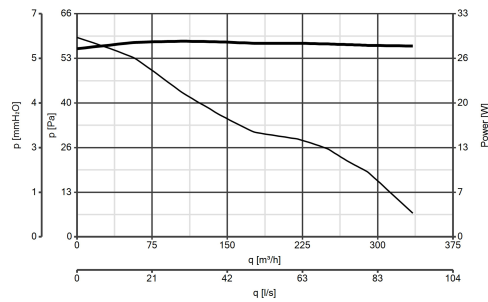

### ACCESSORIES



**S 150/6**

Code 22156



**F 150/6"**

Code 22133

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)