



IP65 Backlit LED Panel

The IP65 version of our Arial Backlit LED Panel is an ideal product for areas that may contain moisture such as changing rooms, locker rooms & commercial kitchen environments.

- Front face IP65
- Professional Backlit LED panel
- 0-10V Dimming or DALI Dimming options available
- BELL Driver
- · Anti-twist frame
- Emergency panels with 5 year battery warranty available




















LMR80: Maximum 20% of lumen depreciation over rated hours. B10: Maximum 10% of fittings failure rate over rated hours

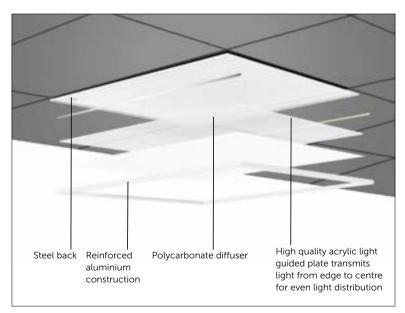













IP65 Backlit LED Panel

Technical Specification	
Construction	Aluminium + PMMA
Driver	Li Fud
LED Chip	Philips
IP Rating	IP65 (Front face)
Operating Temp	0°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
L1A / L1B / L2A / L2B Compliant	Yes
Emergency Battery Type	NiCd 1 Year Emergency / LiFePO4 5 Year Emergency

 $^{^1}$ Exceeds EU standard of 70 for Lumens Maintenance Ratio 2 Exceeds EU standard of RA 80 for Colour Rendering Index 3 Subject to terms 6 conditions (Contact Customer Service)



IP65 Backlit LED Panel

Code	W	Description	Lm/W	Lm	Temp	Finish	Hours
11070	36	36W Arial IP65 LED Backlit Panel - 600x600mm,	105	4000	4000K	White	50000
11071	36	36W Arial IP65 LED Backlit Panel - 600x600mm, Emergency, (1 Year Battery Guarantee)	105	4000	4000K	White	50000
11073	36	36W Arial IP65 LED Backlit Panel - 600x600mm, White, 0-10V Dim	105	4000	4000K	White	50000
11074	36	36W Arial IP65 LED Backlit Panel - 600x600mm, White, Dali Dim	105	4000	4000K	White	50000
08710	-	LED Emergency Pack	-	-	-		

Available on request:

- Emergency 0-10V Dim
- Emergency Dali Dim
- Emergency panels with 5 year battery warranty available

For further information call 01924 893380 or email sales@belllighting.co.uk

Emergency versions must be tested in line with the requirements of BS5266, failure to do so may effect battery life and warranty.

