

JC070066

RadiaLED Rapid

RadiaLED Rapid IP65 4000K 8W Emergency + With RIM



Features & Benefits

- 2.5x Faster to install than traditional LED bulkheads
- Detachable terminal, for simple wiring connection
- Multiply cable entry, central and offset rear entry points
- 20mm conduit entry, on top, bottom, sides and rim
- Clip-in tool-less LED gear tray design
- Smooth, even light distribution
- IK10, maximum impact rating
- IP65 protection against dust and moisture
- Emergency, microwave and dimmable options
- Complete with white rim as standard



BEAM



CLASS I



CRI:RA



EMERGENCY



RATING



RATING



WARRANTY

General Information

Product Group

Product Range

Trade Name

Light Source

Light Source Features

IK Rating

Product Shape

Mounting

Product Weight

Color Finish

Overall Dimensions

Recommended Product Location

Method Of Fix

IP Rating

Environment

Suitable For Zones

LED- Surface

RadiaLED Rapid

RadiaLED

LED

Neutral White

IK10

Round

Wall or ceiling

1.1

White

Ø274 x 93.3

Suitable for interior and exterior applications for ceiling and wall mounting

Back screw fix or BESA plate mounting

IP65

Demanding

Suitable for inside Zone 1

Luminaire Accessories	JC070203 -4 security screws, JC070204 -Tool for RadiaLED Rapid
Distance From Lighted Object	security screws. 5 rim options including eyelid
Origin of manufacturer	0.3
Warranty	China
Driver Manufacturer	2 years standard warranty extends to 5 years when registered
LED Manufacturer/Type	within the first year of purchase (See Website for terms and
Lighting Product Type 1	conditions)(2 years on batteries)
Lighting Product Type 2	JCC
Lighting Product Type 3	3528/Nationstar
	Ceiling mount
	Wall light
	Emergency lighting

Electrical

Voltage Rating	220-240
Secondary Running Current	180mA
Primary Running Current	0.35A
Operating Frequency Hz	50/60
CC or CV	Constant Current
Luminaire Circuit Wattage	8
Sec - Voltage (V)	33
Class	Class I
EMC Compliant (EN55015)	Yes
Power Factor Correction	0.5
Input Electrical Connections	Live, Unswitched Live, Earth, Neutral
Dimmable	No

Emergency Data

Load Voltage	45VDC
Nominal Battery Current	1600mA
Recharge Time	24 hours
Battery Specification	1 x 3.2V 1.6Ah
Battery Type	Li-ion(Lithium-ion)
Battery Total Weight	0.005kg
Battery Life In Emergency Mode	3 hours
Charge Current	200mA
DDP Protection	Yes
LOR In Emergency Mode	17%
Inverter PFC	0.88

Thermals

Room Ambient Temperature	26°C
Max Driver/Ballast Ambient Temp.	45°C

Performance Data

LED Life (Hours)	60000
------------------	-------

Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

Energy Rating	A+
Actual Lumen Output	760
Lumens Per Circuit Watt	95
Standard Deviation Colour Matching - SDCM	≤ 6
Color Rendering Index	80-89
CRI: Ra	84
Correlated Color Temperature	4000
Light Distribution Detail	116
LOR (Light Output Ratio) %	100
Photometry Available	Yes

Construction

Primary Material	Polycarbonate
Outer Diffuser	Polycarbonate
LED Brand	Nationstar
Heat Sink	PA6 nylon
Driver Housing	Polycarbonate
Rim Or Attachment	Polycarbonate


Packaging

Product Carton Dimensions	28.5 x 28.5 x 10 cm
Product Packaged Weight	1.3
Quantity Per Outer Carton	8
Outer carton(L)- cm	59.5
Outer carton(W)- cm	30.5
Outer carton(H)- cm	43
Outer carton overall dimensions	59.5 x 30.5 x 43cm
Outer carton Net weight- kg	10.4
Outer carton Gross weight- kg	10.95
Product Bar Code EAN-13 Number	5052544106200
Outer carton Bar Code ITF-14 Number	15052544106207

Standards & Approvals

Manufactured In Accordance To
CE Marked
Date code/Purchase order No.
WEEE Symbol
Certificate Of Conformity
Accredited Members

BS EN 60598-2-1,2-22
Yes
Yes
Yes
Available on request
LIA, ISO9001:2015, ISO14001:2015

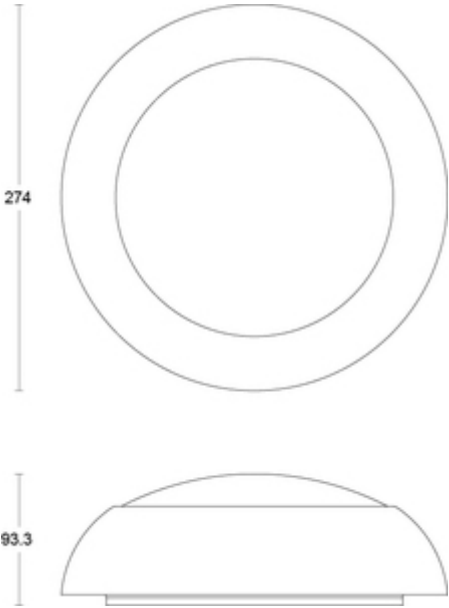





JCC Lighting LTD Innovation Centre, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex PO22 9TS
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk
Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 48 [23 Sep 2020]