

JC130005

Wall Pack

30W LED Commercial Wall Bulkhead Emergency

Features & Benefits

- IP65 protection
- IK08 rated
- Photocell option available



CLASS I



CRI:RA



EMERGENCY WARRANTY



5yr

General Information

Product Group

Product Range

Light Source

Light Source Features

Mounting

Product Weight

Color Finish

Overall Dimensions

Recommended Product Location

Method Of Fix

IP Rating

Environment

Suitable For Zones

Origin of manufacturer

Warranty

Driver Manufacturer

LED Manufacturer/Type

Lighting Product Type 1

LED Bulkhead

LED Commercial Wall Bulkhead

LED

Neutral White

Wall mounted

2.2kg

Black

308 x 288 x 126mm

Suitable for interior and exterior

Back screw fix

IP65

Demanding

Suitable for inside Zone 1

China

2 years standard warranty extends to 5 years when registered within the first year of purchase (2 years on batteries) (See Website for terms and conditions)

Ding Sheng

Derunda Optoelectronics

Wall Mount

Electrical

Voltage Rating	100-240V~
Secondary Running Current	900mA
Primary Running Current	1.0A
Operating Frequency Hz	50/60Hz
CC or CV	Constant current
Luminaire Circuit Wattage	30W
Sec - Voltage (V)	20-36Vdc
Class	Class I
Total Harmonic Distortion (THD)%	10%
EMC Compliant (EN55015)	Yes
Power Factor Correction	0.95
Input Electrical Connections	Unswitched live, earth, switched live, neutral
Dimmable	No

Emergency Data

Load Voltage	10-60VDC
Nominal Battery Current	2600mA
Recharge Time	24 hours
Battery Specification	3.7V 2600mAh
Battery Type	Li-ion(Lithium-ion)
Battery Total Weight	200g
Battery Life In Emergency Mode	3 hours
Charge Current	10-100mA
LOR In Emergency Mode	10%

Thermals

Room Ambient Temperature	25°C
Max Driver/Ballast Ambient Temp.	85°C

Performance Data

Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

Actual Lumen Output	2600
Lumens Per Circuit Watt	87
CRI: Ra	72
Correlated Color Temperature	4000
Photometry Available	Yes

Construction

Primary Material

Aluminium

Outer Diffuser

Polycarbonate

Driver Housing

Polycarbonate

Packaging

Product Carton Dimensions

30.5 x 13 x 31.5cm

Product Packaged Weight

2.4kg

Quantity Per Outer Carton

4

Outer carton(L)- cm

54.5cm

Outer carton(W)- cm

33cm

Outer carton(H)- cm

33.5cm

Outer carton overall dimensions

54.5 x 33 x 33.5cm

Outer carton Net weight- kg

9.62kg

Outer carton Gross weight- kg

10.36kg

Product Bar Code EAN-13 Number

5052544106064

Outer carton Bar Code ITF-14 Number

15052544106061

Standards & Approvals

Manufactured In Accordance To

BS EN 60598-2-1

CE Marked

Yes

Date code/Purchase order No.

Yes

WEEE Symbol


Yes

Certificate Of Conformity

Available on request

Accredited Members

LIA, ISO9001:2015, ISO14001:2015

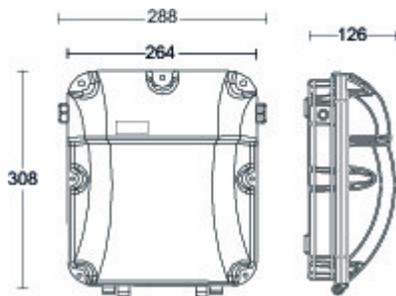



JCC Lighting LTD Innovation Centre, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex PO22 9TS
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk
Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 15 [22 Sep 2020]