

Data Sheet

Europa House, Airport Way, Luton, Beds, LU2 9NH Tel: 01582 692 440 (Sales) | 01582 692 444 (Technical) e-mail: sales@europacomponents.com | technical@europacomponents.com website: www.europacomponents.com

Part Number: GRGC16M

SENTINEL RANGE Garage Unit (IP20) with 63A RCCB Type A + 16A and 6A MCBs

Description

The distribution equipment and circuit protection range of metal consumer units by Europa Components are designed to fully comply with the requirements of BS EN 61439-3 and the requirements of the 18th Edition of BS 7671 IET Wiring Regulations. With multiple configurations available, the range offers flexible versatile solutions for installations.

Features & Benefits

- Includes 63A Type A RCCB, 16A MCB B Curve and 6A MCB B Curve.
- Type A RCCB also suitable for Type AC applications.
- Compact and unobtrusive design for restricted spaces.
- Metal enclosure, suitable for domestic application.
- Epoxy powder coated RAL 7035.
- Earth and neutral terminals provided.
- Labels included for easy identification.
- Comes pre-wired, ready to install out of the box.






ENSURE THAT THESE INSTRUCTIONS ARE MADE AVAILABLE TO THE END USER FOR FUTURE REFERENCE

EDS1375-001 Page 1 of 2



Data Sheet

Cable and Torque Settings Device Max Cable Capacity (mm2) Recommended Tightening Torque (Nm) RCCB 35 2.5 MCB 16 2.0

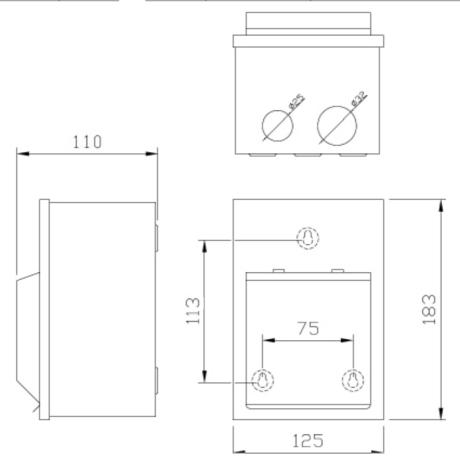

Notes

This unit must be installed by a skilled or instructed person in accordance with the current BS 7671 IET Wiring Regulations. The product must be tested by skilled persons competent for verification after installation and before being put to service. Please ensure these instructions are available to the end user for future reference. Total load not to exceed the rating of of the incoming main switch or RCCB.

It is important to ensure that all connections, including factory-made, must be checked for the correct installation and tightness, prior to the commissioning of the electrical installation

This product is only suitable for indoor installation

EDS1375-001 Page 2 of 2