


# LEDX30FLWHN

## 30W LED Wide Angle Floodlight – White

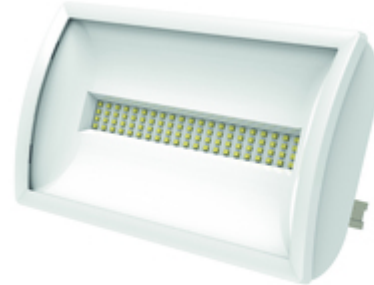

### Features & Benefits

- Rust resistant Floodlight
- 316 stainless steel bracket and screws
- Marine grade aluminium heat sink
- Polycarbonate body and reflector
- Longlife – up to 30,000 hours for low maintenance
- Easy quick fit bracket installation

### Technical Data

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Bracket Mounted
Earth Class Rating	Class I
Operating Temperature	-10°C to 40°C
Ingress Protection Rating	IP55
Wattage	30
Beam Angle	110° x 100°
Pan & Tilt Adjustment	110° Tilt (Floodlight)
Energy Efficiency	Class E
Energy Usage	32kWh/1000H
Lumen output (lm)	3000
Luminaire Efficiency	100 lm/W
Colour Temperature (K)	4000

# Data sheet

## LEDX30FLWHN

Light / LED Wide Beam Lighting

LED Type	SMD (Integrated)
Mounting Hole Centres (mm)	70
Multiple Unit Support	Yes
Cable Entry(s)	Side Entry (Grommet)

### General

Weight (g)	789
Height (mm)	138
Width (mm)	244
Depth (mm)	112 (Inc Bracket 157)
Body Construction	Polycarbonate (Bracket 316 Stainless Steel, including screws)
Product Colour	White
Accessories (Included)	Fittings (Rawl Plugs, Screws)
EAN Number	5012483014943
Guarantee Period	3 Years
Trade Tariff Commodity Code	9405114090

### Line Diagrams

