

Photo-cell-controlled light

L 710 N

Anthracite
EAN 4007841 053161
Article number 053161



3000 K



3000K warm-white

Twilight switch



IP44



soft light start



energy saving

3 years

manufacture's
warranty
steinel.de/
garantie3y



CE



Light source not
exchangeable



Control gear not
exchangeable



TüV Nord GS

Function description

Beautiful light in pure form. Quite simply, the attractive outdoor light without motion detector always cuts a fine figure whether ON or OFF. The L 710 N is made of UV-resistant plastic and features a modern aluminium designer-style element. The warm-white light (3000 K) sets off building walls with absolute competence. With photo-cell controller, automatic lighting at night and optional night-economy mode. Available in anthracite.

Technical specifications

Dimensions (L x W x H)	140 x 260 x 63 mm
With lamp	Yes, STEINEL LED system
Manufacturer's Warranty	3 years
Settings via	Potentiometers
With remote control	No
Version	Anthracite
PU1, EAN	4007841053161
Application, place	Outdoors
Application, room	outdoors, front door, all round the building, terrace / balcony
Colour	Anthracite
includes sheet of self-adhesive numbers	No
Installation site	wall
Impact resistance	IK03
IP-rating	IP44
Protection class	II

Sneak-by guard	No
Capability of masking out individual segments	No
Electronic scalability	No
Mechanical scalability	No
Photo-cell controller	Yes
Cover material	sticker
Luminous flux total product	729 lm
Measured luminous flux (360°)	729 lm
Total product efficiency	88 lm/W
Colour temperature	3000 K
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Service life LED L70B50 (25°)	> 60000 h
Base	without
LED cooling system	Passive Thermo Control
Soft light start	Yes

<https://www.steinel.de>

Subject to technical modifications

04.2023 Page 1 from 2

Photo-cell-controlled light

L 710 N

Anthracite
EAN 4007841 053161
Article number 053161




Technical specifications

Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	8,3 W
Average rated life expectancy of power supply unit at 25°C	> 60000 h
Slave modeselectable	No

Functions	Light sensor
Twilight setting	2 – 2000 lx
Basic light level function	No
Twilight setting TEACH	No
Interconnection	No
Colour Rendering Index CRI	= 82

Dimension Drawing

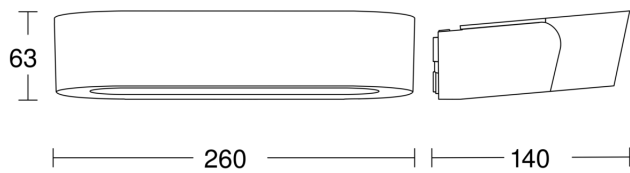

Circuit diagram

