


Lo-Carbon Silent Fan

- Stylish open front models
- From only 12dB(A)
- High efficiency long life motor rated up to 40,000 hours run time
- 5 year warranty
- IPX5 - Zone 1 rated
- Meets current Building Regulations Approved Document F and L
- Extra-long duct run? Variable speed adjustment at installation allows you to get the airflow you need
- Closed or open fronted models
- Silent bathroom fan with intermittent and continuous running options
- Back draught shutters included
- Suitable for wall, ceiling, window and panel mounting



Lo-Carbon Silent Fan Axial Bathroom/Toilet Fan

The Lo-Carbon Silent Fan Range from Vent-Axia not only delivers stylish and silent ventilation without compromise on performance, but now comes with even more features and more model options providing flexibility when choosing the right fan.

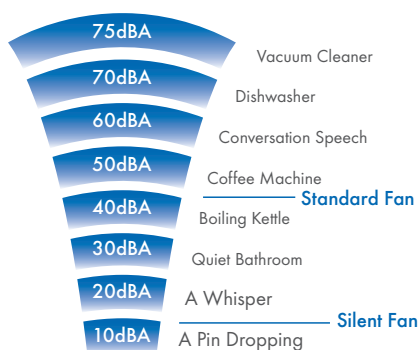

Models

Zone 1 Variable Speed, Intermittent

Remote or light switch operation. Variable speed options selectable at install. Intermittent operation.

Model	Stock Ref
VASF100BV (closed grille)	479085
VASF100BV0 (open grille)	495700

Zone 1 Variable Speed, Intermittent, Timer

Intermittent Operation. Fixed 15 min overrun timer. Variable speed options selectable at install.

Model	Stock Ref
VASF100TV (closed grille)	479086
VASF100TV0 (open grille)	495701

Zone 1 Variable Speed, Intermittent, Humidity Timer

Intermittent Operation. Humidity controlled with fixed 15 min timer overrun. Variable speed options selectable at install.

Model	Stock Ref
VASF100HTV (closed grille)	479087
VASF100HTV0 (open grille)	495702

Zone 1 Variable Speed, Continuous, Timer

Fixed 15 min overrun timer. Continuous running fan with variable speed selectable at install.

Model	Stock Ref
VASF100TC (closed grille)	479088
VASF100TC0 (open grille)	495703

Zone 1 Variable Speed, Continuous, Humidity Timer

Humidity controlled with fixed 15 min timer overrun. Continuous running fan with variable speed selectable at install.


Model	Stock Ref
VASF100HTC (closed grille)	479089
VASF100HTC0 (open grille)	495704

Accessories


Model	Stock Ref
Window Kit	442947
Wall Kit White	254102
Wall Kit Brown	254100
Internal Fit Wall Kit White + Backdraught Shutter	474779

Dimensions (mm)

Closed Grille

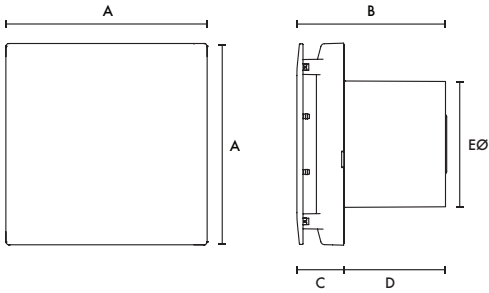

Open Grille

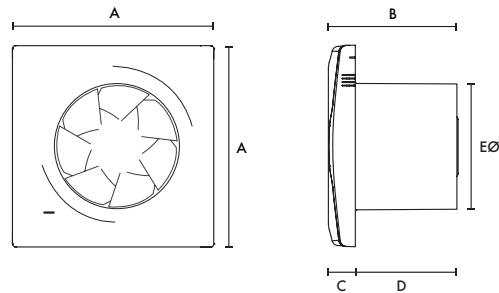


Grille	A	B	C	D	EØ
Closed	160	117	37	80	99
Open	160	117	22	80	99


Weight 0.7kg

Performance Guide

Closed Grille

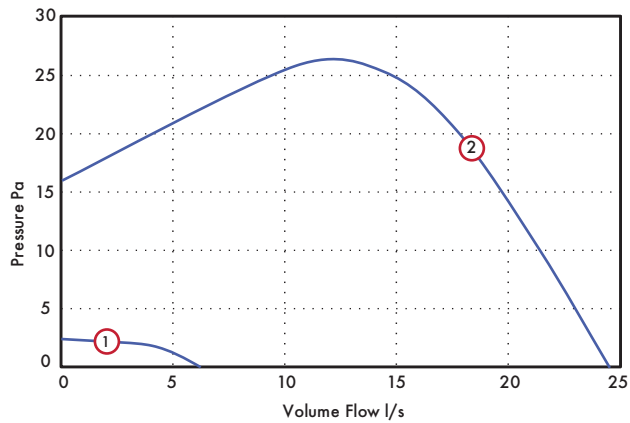

Open Grille

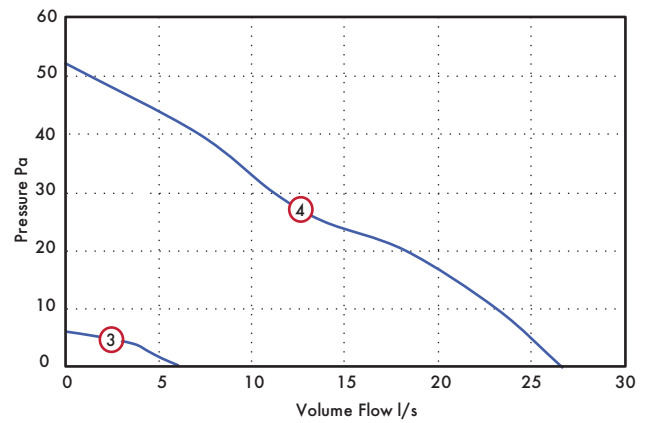

	Model	Speed	l/s	Watts	Warranty (years)
Variable Speed	VASF100BV/ TV/HTV	① Min	6	1.7	5
		② Max	24	7.5	
	VASF100TC/ HTC	Adjustable	6 - 15	1.7 - 7.5	5
		Trickle			
		Boost	Adjustable Trickle + 10 (Up to a max of 22 installed)	7.5	

12dB(A) - Sound dB(A) @3m at low speed

	Model	Speed	l/s	Watts	Warranty (years)
Variable Speed	VASF100BVO/ TVO/HTVO	③ Min	6	1.7	5
		④ Max	27	7.5	
	VASF100T- CO/HTCO	Adjustable	6 - 19	1.7 - 7.5	5
		Trickle			
		Boost	Adjustable Trickle + 10 (Up to a max of 22 installed)	7.5	

12dB(A) - Sound dB(A) @3m at low speed